

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 1 114 921 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
11.07.2001 Bulletin 2001/28

(51) Int Cl.7: F01N 11/00

(21) Application number: 00311449.3

(22) Date of filing: 20.12.2000

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: 07.01.2000 US 479534

(71) Applicant: Ford Global Technologies, Inc.
Dearborn, Michigan 48126 (US)

(72) Inventors:
• Dobson, Douglas A.
Plymouth, Michigan 48170 (US)

- Hepburn, Jeffrey Scott
Birmingham 48009 (US)
- Kluzner, Michael Igor
Michigan 48237 (US)
- Jerger, Robert Joseph
Dexter, Michigan 48130 (US)
- Chanko, Timothy
Canton, Michigan 48188 (US)
- Watkins, William Lewis Henderson
Toledo, Ohio 43607 (US)

(74) Representative: Messulam, Alec Moses
A. Messulam & Co. Ltd.,
43-45 High Road
Bushey Heath, Bushey, Herts WD23 1EE (GB)

(54) Method and system for evaluating exhaust on-board diagnostics systems

(57) A system and method of normalising an emissions threshold catalytic brick 302 without a mileage accumulation step is used to evaluate an on-board diagnostics for an exhaust system. The method comprises normalising a emissions threshold catalytic brick 302 by placing the emissions threshold catalytic brick 302 in a exhaust gas circulation oven, such as a retort chamber 300, immediately after an oven-ageing and chemical ageing process wherein the emissions threshold cata-

lytic brick 302 is saturated with a exhaust gas at a predetermined rate and at a predetermined temperature for a specified period of time based upon the characteristics desired for the emissions threshold catalytic brick. Additionally, a method for evaluating on-board diagnostics of an exhaust system using an emissions threshold catalytic brick 302 based upon the characteristics of the exhaust system that it will be placed in is also contemplated.

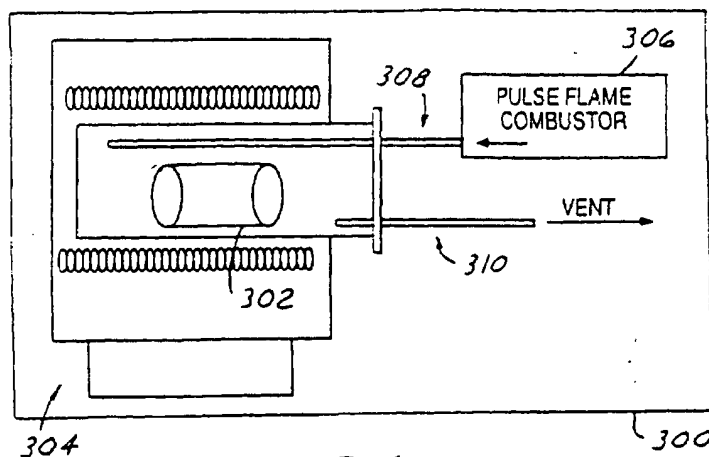


FIG.4

EP 1 114 921 A2

Description

[0001] The present invention relates generally to an exhaust system for automotive vehicles. More particularly, the present invention relates to simulating real world conditions to create exhaust system components for testing on-board diagnostics system.

[0002] Emissions controls systems are generally used as a means for limiting pollutants from the exhaust gas of an internal combustion engine. These emissions control systems limit, among other things, carbon monoxide (CO), hydrocarbon (HC), and nitrous oxide (NO_x) from engine exhaust gases in a variety of methods.

[0003] As it is known in the industry, the performance of a catalytic converter, and specifically catalytic converter bricks contained therein, varies as a function of time due to conditions such as chemical and thermal breakdown. The variance in performance of a catalytic converter brick is detected in the portion of a vehicle's on-board diagnostics (OBD) systems that detects emissions and emissions variances. To evaluate and verify the performance of OBD systems, experimental exhaust systems are created to verify in a laboratory setting that an OBD system is functioning properly. To do this, aged production catalytic bricks are needed to simulate the testing conditions necessary for verifying that an OBD is working properly.

[0004] It is known in the industry that levels of tailpipe emissions (HC, CO, and NO_x) are typically higher in vehicles with catalytic converter bricks placed in vehicles without a mileage accumulation than with a few hundred-mile accumulation. It is thus standard practice to stabilise (normalise) these catalytic converter bricks which are to be used to evaluate an OBD system. One method to accomplish this normalization process is to pass exhaust gases through the catalytic converter brick using an engine dynamometer stand, in effect simulating a mileage accumulation period. Unfortunately, this dynamometer period is both costly and time consuming.

[0005] The normalization step is part of a typical four-stage process for creating catalytic converter bricks with specific performance characteristics that are used to evaluate OBD systems under real world conditions. The four-stage process for creating the catalytic converter brick under the current methodology includes first determining the type of catalytic converter brick that will be placed in the exhaust system based upon the characteristics of the particular exhaust system. Next, the catalytic converter brick is thermally aged to a predetermined condition. Then, the catalytic converter brick is chemically aged to a predetermined condition. Finally, the catalytic converter brick is normalised to a predetermined condition. Each step is described in more detail below.

[0006] First, the type, density and size of a catalytic converter brick in an exhaust system is determined based upon the individual characteristics of the exhaust system that it will be placed in. Second, the catalytic con-

verter brick is thermally aged for a predetermined time at a predetermined temperature to simulate real world thermal breakdown of the catalytic converter brick at a particular location in an exhaust system. Third, the catalytic converter brick is chemically aged for a predetermined time at a predetermined concentration of chemical contaminate to simulate real world chemical breakdown of the catalytic converter brick at a particular location in an exhaust system. Finally, the catalytic converter brick is normalised by placing the catalytic converter brick in an exhaust system that is placed on an engine dynamometer stand for a predetermined amount of hours to simulate real world chemical and thermal breakdown as a result of typical mileage accumulation of a catalytic converter brick on a vehicle. This normalised catalytic converter brick will have a particular emissions characteristic (within a certain parameter) that has been previously verified when it is placed in a laboratory exhaust system. If the OBD systems is functioning properly when placed on the laboratory exhaust system, it will read a similar emissions characteristic for the normalised catalytic converter brick.

[0007] It would therefore be desirable to provide a normalised catalytic converter brick, hereinafter an emissions threshold catalytic brick, without the accompanying mileage accumulation in order to evaluate and verify the operation of OBD systems under real world conditions.

[0008] According to the present invention there is provided COPY CLAIM 1

[0009] A method embodying the present invention has an advantage that it provides an emissions threshold catalytic brick without an accompanying mileage accumulation that may be used for testing of an OBD exhaust systems in real world situations.

[0010] The emissions threshold catalytic brick is normalised without the need for mileage accumulation by placing the emissions threshold catalytic brick immediately after thermal and chemical ageing in an exhaust gas circulating oven.

[0011] An overall OBD Emissions Threshold Catalyst Process for evaluating an OBD system in a laboratory environment comprises the steps of determining the location, type, size and density of the emissions threshold catalytic brick based upon the characteristics of the exhaust system in which the emissions threshold catalytic brick will be used; determining an ageing time and temperature for thermal ageing of the particular emissions threshold catalytic brick based upon these same characteristics; determining a chemical ageing process of the particular emissions threshold catalytic brick based upon these same characteristics; normalising the emissions threshold catalytic brick by placing it in an exhaust gas circulating oven at a particular temperature, time, and air/fuel stoichiometry based upon these same characteristics, and placing the emissions threshold catalytic brick in an experimental exhaust system with these same characteristics to verify that an OBD exhaust sys-

tem is functioning properly.

[0012] The present invention will now be described further, by way of example, with reference to the accompanying drawings, in which:

Figure 1 is a schematic diagram of a typical exhaust system used in an internal combustion engine;

Figure 2 is a flow chart diagram of the process of determining the ultimate characteristics of the emissions threshold catalytic brick used in exhaust systems according to a preferred embodiment of the present invention;

Figure 3 is a detailed logic flow diagram of portions of Figure 2 according to a preferred embodiment of the present invention;

Figure 4 is the apparatus for normalising the emissions threshold catalytic brick in an exhaust gas circulating oven according to a preferred embodiment of the present invention;

Figure 5 is a graph showing tailpipe Hydrocarbon (HC) emissions for systems using oven-aged catalysts with and without stabilization at various accumulated mileages;

Figure 6 is a graph showing tailpipe Carbon Monoxide (CO) emissions for systems using oven-aged catalysts with and without stabilization at various accumulated mileages;

Figure 7 is a graph showing tailpipe Nitrous Oxide (NO_x) emissions for systems using oven-aged catalysts with and without stabilization at various accumulated mileages, and

Figure 8 is a correlation graph of HC emissions showing the performance of bricks aged according to the present invention versus actual road aged bricks.

[0013] Turning now to Figure 1, an (exhaust system 10 is illustrated in operational relationship with an internal combustion engine 12. The engine 12 has an exhaust manifold 14 to direct the exhaust gases from the engine 12 to the exhaust system 10. Closely coupled to the exhaust manifold 14 is a catalytic converter brick 16, which functions to oxidise a majority of the HC and CO as well as a portion of the NO_x in the exhaust flow at its operational temperature. The exhaust system 10 may further contain an HC trap 18, which captures HC from the engine 12 prior to the catalytic converter brick 16 reaching operational temperature, and a NO_x trap 20, which absorbs exhaust gas NO_x .

[0014] The functioning of the catalytic converter brick 16, the HC trap 18 and the NO_x trap 20 are controlled and monitored by the engine control module (ECM) 28. Logic control of the exhaust system 10 is controlled by the ECM 28 ideally containing a microprocessor and associated memory 32. At least one catalyst monitor sensor (CMS) 24 and at least one heated exhaust gas oxygen sensor (HEGO) 26 provide feedback to the ECM 28 corresponding to exhaust gas concentrations at various

locations on the exhaust system 10. Temperature sensors 34 and oxygen sensors 27 provide feedback to the ECM 28 corresponding to exhaust gas temperatures at various locations on the exhaust system 10. The ECM 28 functions to limit emissions output of the exhaust system 10 by interpreting the data collected from the CMS 24, the HEGO 26, the oxygen sensors 27 and the temperature sensors 34 to modify or adjust various engine parameters (e.g. combustion mode, air/fuel ratio, spark, exhaust gas recirculation, gear ratio) of the internal combustion engine 12 based upon engine speed, load, vehicle speed, operating conditions (e.g. cold start, warm) and acceleration rate, among other things, as is known in the art. The ECM 28 also will modify or adjust engine parameters to account for purging cycles of the HC trap 18 and NO_x trap 20 as is known in the art. Collectively, the ECM 28, CMS 24, the HEGO 26, the oxygen sensors 27 and the temperature sensors 34 comprise a portion of the OBD system 40 for a vehicle.

[0015] Figure 2 is a flow chart for creating an ideal emissions threshold catalytic brick for testing the OBD exhaust system according to a preferred embodiment. First, the physical configuration of the exhaust system, including the location of the various catalytic converter bricks and various sensors used in the system, is determined in Step 100. The information in Step 100 includes exhaust pipe configuration (Y-shaped, standard, or other), sensor (CMS, HEGO, temperature, oxygen or other) location, catalyst brick type (COC catalyst, three way catalyst (TWC), HC trap, NO_x trap, low OSC catalyst, high OSC catalysts, zoned catalyst, or another brick known in the industry), catalytic converter brick location and number, and catalytic converter brick volume (both monitored and unmonitored). Based upon this initial information, an oven-ageing recipe and temperature time formulation is determined in Step 102 for an individual emissions threshold catalytic brick. The emissions threshold catalytic brick is then placed into a ceramic oven according to this recipe to thermally age the emissions threshold catalytic brick as further described below in Figure 3.

[0016] In addition, based upon the initial information of Step 100 and the thermal ageing process of Step 102, a chemical-ageing process of the emission threshold catalyst brick is determined in Step 104. Here, the emissions threshold catalytic brick is dipped in a phosphoric acid (or phosphate salt) in water slurry of a predetermined concentration (ranging up to 10% by volume P_2O_5 in solution) for a predetermined time based upon Step 100. Portions of the emissions threshold catalytic brick may be dipped more frequently to form a gradient on the emissions threshold catalytic brick, depending upon the level of phosphorus contamination at a particular location desired. Phosphorus levels of 1-7% of total brick weight are typical for evaluation purposes, with 1-1.5% typical for a 100,000 mile real world customer catalyst systems in vehicles and higher levels (approaching 7%) likely to turn on a malfunction indicator

light on a vehicle (indicating that the phosphorus contamination has inhibited the ability of catalytic converter bricks to limit emissions according to the particular emissions standards for that vehicle).

[0017] The dipped emissions threshold catalytic brick is then placed in a calcining oven to drive off water for a predetermined time at a predetermined temperature (typically around four hundred degrees Celsius). Next, again based upon the initial information of Step 100, combined with the processes of Step 102 and 104, the emissions threshold catalytic brick is normalised according to Step 106. Finally, the emissions threshold catalytic brick resulting from Steps 100 through 106 is then available in Step 108 for laboratory testing of on-board diagnostic (OBD) exhaust systems to evaluate whether the OBD is performing properly by either adjusting engine controls or warning the vehicle operator that there is an emissions problem.

[0018] Figure 3 is a detailed logic flow diagram of portions of Figure 2. The portions detailed in Figure 3 represent the temperature model and thermal ageing step 102 as shown in Figure 2. The logic flow diagram of Figure 3 illustrates the steps of ageing the emissions threshold catalytic brick at a predetermined temperature and a predetermined time in a thermal ageing oven based upon the size, type and location of the emissions threshold catalytic brick. For example, a typical catalytic brick used in these evaluations may be aged at 1300 degrees Celsius for 12 hours with a very short ramp up time (described as the time to get the object to the temperature desired). Similar to Step 102 of Figure 2, Step 202 of Figure 3 determines an oven-ageing recipe and temperature/time formulation for an emissions threshold catalytic brick based upon a number of factors. A sample emissions threshold catalytic brick is then placed in a laboratory flow reactor in Step 204 to determine a kinetic rate constant for the particular emissions threshold catalytic brick. The kinetic rate constant is then incorporated into a database in Step 206 and used to produce a catalyst model in Step 208 and to project tailpipe emissions for that catalyst model in Step 210. In Step 212, the catalyst model is tested to see if the target threshold emission is met. If it is not, Step 212 indicates that the process should revert back to step 206. If it is met, Step 214 is executed. In Step 214, the full-sized emissions threshold catalytic brick should be oven-aged according to the recipe determined in Step 202. The full-sized emissions threshold catalytic brick is then stabilised in Step 216 according to the recipe. Step 218 allows for calibration of the full-sized emissions threshold catalytic brick by an engineer based upon subsequent testing results after Step 216. The full-sized emissions threshold catalytic brick is then placed in its exhaust system configuration in Step 222 and catalyst inlet temperature and feedgas emission data are determined in Step 224. The information is fed to the catalyst model in Step 208 and the process begins again to achieve the ultimate thermal ageing process for each brick location,

type, and size. Similarly, the same process can be used for the chemical ageing process (as described above), and for a combination thermal and chemical ageing process. Since most catalytic converter bricks experience thermal and chemical breakdown, most simulated bricks produced according to Figures 2 and 3 are both thermally and chemically aged.

[0019] Figure 4 illustrates the apparatus for normalising the emissions threshold catalytic brick 302 in an exhaust gas circulating oven, such as a retort chamber 300, according to a preferred embodiment of the present invention. In Figure 4, the emissions threshold catalytic brick 302 is placed in a ceramic oven 304 of a retort chamber 300. A pulse flame combustor 306, acting in a similar manner to the combustion system of an internal combustion engine, delivers a exhaust gas (the exhaust gas is the product of combusting a fuel vapour previously introduced to the pulse flame combustor 306, where the fuel vapour is a mixture of air and fuel at approximately a stoichiometric ratio, or 14.6:1 air to fuel) and introduced to the ceramic oven 304 through a connector 308 at a predetermined rate. The ceramic oven 304 is heated to a predetermined level (typically around 600 degrees Celsius) and the emissions threshold catalytic brick 302 remains in the ceramic oven 304 for a predetermined time (typically 2-12 hours). The rate, level, and time are a function of the location and size of the emissions threshold catalytic brick 302 needed for a particular system as determined in Step 100 above. The exhaust gas is vented from the ceramic oven 304 through a vent 310. The emissions threshold catalytic brick 302 is removed from the ceramic oven 304 at the completion of the process and is available to test and verify OBD exhaust systems in a laboratory exhaust system.

[0020] Figures 5, 6, and 7 are graphs that verify that the retort stabilization process significantly decreases tailpipe emissions without mileage accumulation for a particular engine. All three graphs plot the amount of tailpipe emissions of a particular pollutant (HC, CO or NO_x) in grams per mile for various types of catalytic converter bricks. The catalytic converter bricks in all three figures were thermally aged for 12 hours at 1300 degrees Celsius and then normalised according to the process described above.

[0021] Figure 5 is a graph that illustrates that the normalization process reduces tailpipe HC emission without a necessary mileage accumulation. As shown in Figure 5, oven-aged catalytic bricks that were not stabilised and without mileage accumulation had HC tailpipe emissions of approximately 2.3 gm/mi, while stabilised emissions threshold catalytic bricks without mileage accumulation had HC tailpipe emissions of approximately 1.3 gm/mi, which corresponds to a 43% drop in HC tailpipe emissions. This compares favourably to an oven-aged brick without stabilization with 3000 miles, which had HC tailpipe emissions of approximately 1.2 gm/mi. Figure 5 further shows that the stabilised emissions threshold catalytic bricks HC tailpipe emissions dropped to ap-

proximately 1.1 gm/mi after 600 miles.

[0022] Similar results are shown in Figure 6 with CO emissions. Oven-aged catalytic bricks with stabilization and no mileage accumulation averaged drops of approximately 4.1 gm/mi from 10.9 to 6.8 g/mi, or 37.6%. This emission value compared favourably to an oven-aged brick without stabilization at 3000 miles.

[0023] Similar results are shown in Figure 7 with NO_x emissions. Oven-aged catalytic bricks with stabilization and no mileage accumulation averaged drops of approximately 0.35 gm/mi from 2.45 to 2.1 g/mi, or 14.2%. This emission value compared favourably to an oven-aged brick without stabilization at 3000 miles.

[0024] Referring to Figure 8, a validation graph is presented which shows a correlation in HC emissions levels between actual road aged or dynamometer aged catalytic bricks (marked with circular symbols) and catalytic bricks made according to the present invention (marked with rectangular symbols) of similar composition. Catalytic bricks were created according to the present invention of similar composition to catalytic bricks created by known techniques (100,000 mile and 200,000 mile road aged, 100,000 mile dynamometer, 100,000 mile dynamometer with 1.5% phosphorus poisoning, vehicle in-use failure bricks). These bricks were placed in experimental systems and HC emissions levels were determined. Figure 8 shows that catalytic bricks of similar composition, whether aged according to the present invention or by known techniques, exhibited similar HC emissions levels within an area corresponding to one standard deviation level, thus validating that the bricks created according to the present invention are of similar composition.

[0025] Further validation studies (not shown) confirm the results reached in Figure 8. CMS and HEGO sensors placed in experimental systems show that the catalytic bricks made according to the present invention exhibited similar response to real world aged bricks of similar thermal and chemical ageing.

[0026] The result of the process described above in Figures 1 through 8 is the creation of an emissions threshold catalytic brick that has experienced real world chemical and thermal ageing in a laboratory setting in a less costly manner by eliminating the need for mileage accumulation of catalytic converter bricks on a dynamometer. The normalised emission threshold catalytic brick is available to be used to evaluate the operation of OBD systems.

[0027] Thus, it is an object of the present invention to create an emissions threshold catalytic brick without a mileage accumulation normalization step and subsequently use this emissions threshold catalytic brick to evaluate an OBD exhaust system. The method of evaluating OBD systems with an emission catalytic brick comprises the steps of determining a set of characteristics of the emissions threshold catalytic brick to be used in a particular exhaust system, thermally ageing the emissions threshold catalytic brick according to

those characteristics, chemically ageing the emissions threshold catalytic brick according to those characteristics, normalising the emissions threshold catalytic brick in an exhaust gas circulating oven according to those characteristics, and evaluating an OBD system by placing the emissions threshold catalytic brick in a laboratory exhaust system to insure that the OBD system is functioning within the specified guidelines.

Claims

1. A method of normalising an emissions threshold catalytic brick (302) for evaluating an on-board diagnostics exhaust system (10), the method comprising the steps of:

placing said emissions threshold catalytic brick (302) in an exhaust gas circulating oven (304, 306, 308, 310);
introducing a quantity of exhaust gas through said exhaust gas circulating oven (304,306,308,310) at a predetermined rate; and
heating said exhaust gas circulating oven containing said emissions threshold catalytic brick (302) to a predetermined temperature for a predetermined time period.

2. A method according to claim 1, wherein said exhaust gas circulating oven comprises a pulse flame combustor, a ceramic oven, a connector between said pulse flame combustor and said ceramic oven, and a vent, and wherein the step of introducing a quantity of exhaust gas through said exhaust gas circulating oven at a predetermined rate comprises introducing a quantity of exhaust gas to said ceramic oven from said pulse flame combustor through said connector at said predetermined rate and subsequently venting said exhaust gas from said ceramic oven through said vent.
3. A method according to claim 1, wherein the step of introducing said quantity of exhaust gas comprises producing said quantity of exhaust gas by combusting a fuel vapour in said pulse flame combustor.
4. A method of evaluating an on-board diagnostics system by using an emissions threshold catalytic brick, the method comprising the steps of:

determining a set of characteristics of the emissions threshold catalytic brick to be used in the laboratory exhaust system;
thermally ageing the emissions threshold catalytic brick;
chemically ageing the emissions threshold catalytic brick;

normalising the emissions threshold catalytic brick in an exhaust gas circulating oven;
 placing said emissions threshold catalytic brick in an exhaust system having the on-board diagnostics system to be evaluated;
 determining a set of values for the on-board diagnostics system in the laboratory exhaust system with said emissions threshold catalytic brick; and
 comparing said set of values with a set of known values to determine whether said on-board diagnostics system is functioning properly.

5. A method according to claim 4, wherein the step of determining a set of characteristics comprises selecting said set of characteristics of said emissions threshold catalytic brick from a group consisting of an emissions threshold catalytic brick size, an emissions threshold catalytic brick location, an emissions threshold catalytic brick density, and an emissions threshold catalytic brick formulation. 15
6. A method according to claim 5, wherein the step of selecting said emissions threshold catalytic brick formulation comprises selecting said emissions threshold catalytic brick formulation from a group consisting of a COC catalyst, a three way catalyst, an HC traps, a NO_x trap, a low OSC catalyst, a high OSC catalysts and a zoned catalyst. 20
7. A method according to claim 4, wherein the step of thermally aging comprises placing said emissions threshold catalytic brick in a ceramic oven for a predetermined time at a predetermined temperature based upon said set of characteristics. 25
8. A method according to claim 4, wherein the step of chemically aging comprises depositing a phosphorus oxide coating on said emissions threshold catalytic at a predetermined concentration. 30
9. A method according to claim 4, wherein the step of normalising the emissions threshold catalytic brick in an exhaust gas circulating oven comprises: 35

placing the emissions threshold catalytic brick in an exhaust gas circulating oven;
 introducing a quantity of exhaust gas through said exhaust gas circulating oven at a predetermined rate; and
 heating said exhaust gas circulating oven containing said emissions threshold catalytic brick to a predetermined temperature for a predetermined time period. 50

10. A method of evaluating an on-board diagnostics system for a laboratory exhaust system using an 55

emissions threshold catalytic brick comprising the steps of:

determining a set of diagnostic standard values for the laboratory exhaust system having the emissions threshold catalytic brick and a previously calibrated on-board diagnostics system;
 placing the emissions threshold catalytic brick in the laboratory exhaust system having the on-board diagnostics system to be evaluated;
 determining a set of values for the on-board diagnostics;
 comparing said set of values with said set of diagnostic standard values.

11. A method according to claim 10, wherein the step of determining a set of diagnostic standard values comprises determining said set of diagnostics standard values from a group consisting of an oxygen sensor value, a catalyst monitor sensor value, and a temperature sensor value. 15
12. A method according to claim 10, wherein the step of determining a set of values comprises determining said set of values from a group consisting of an oxygen sensor value, a catalyst monitor sensor value, and a temperature sensor value. 20
13. A method according to claim 11, wherein the step of determining a catalyst monitor sensor value comprises selecting a catalyst monitor sensor value being selected from a group consisting of a hydrocarbon emission sensor value, a carbon monoxide emission sensor value, and a nitrous oxide emission sensor value. 25

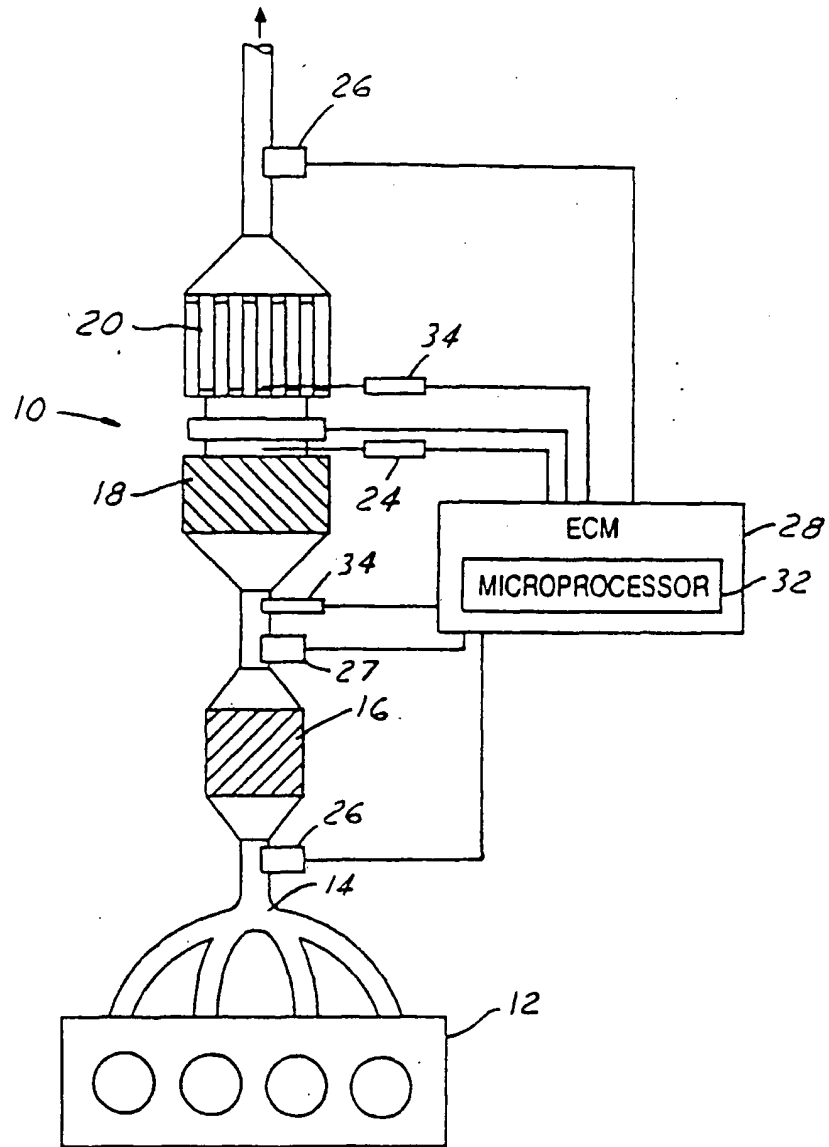
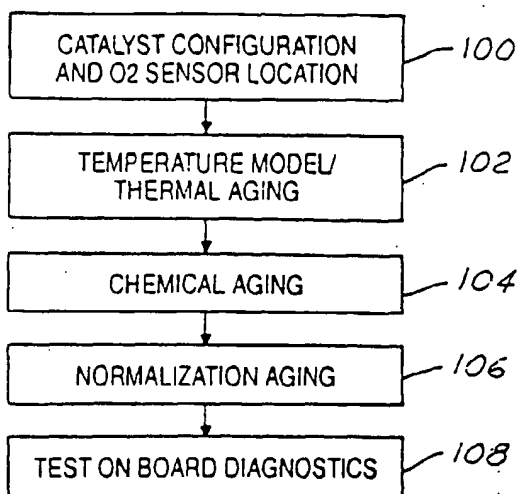
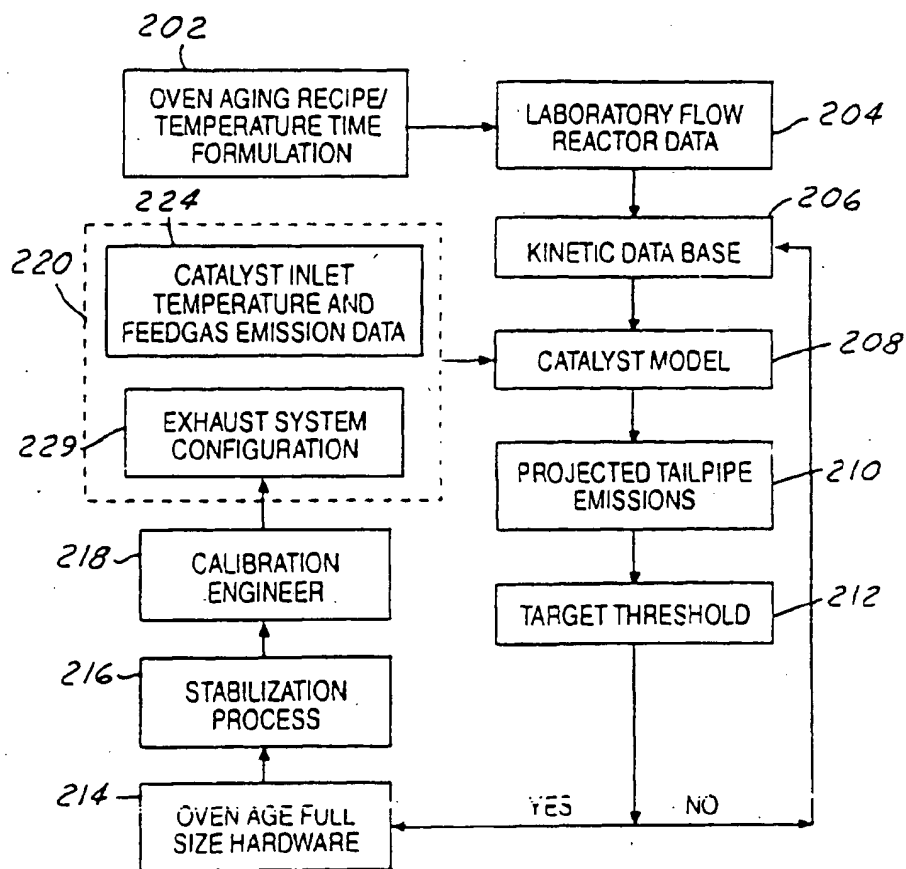


FIG. 1

FIG. 2FIG. 3

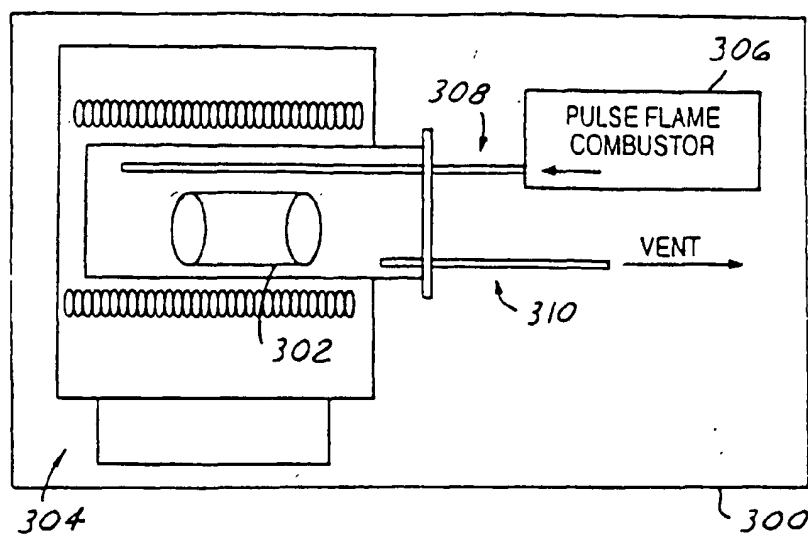


FIG. 4

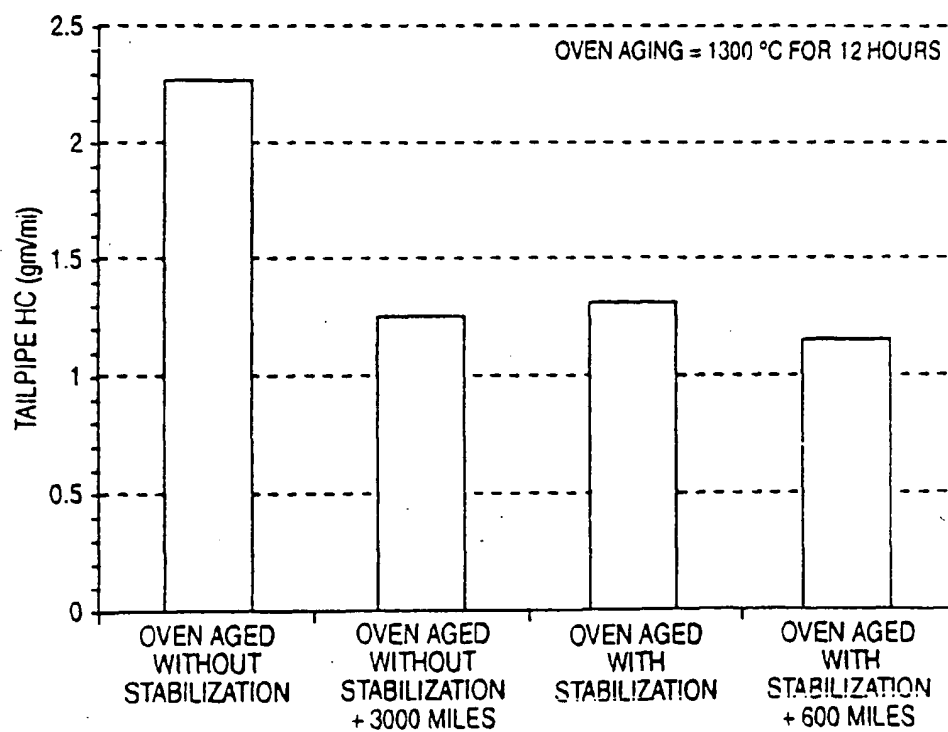
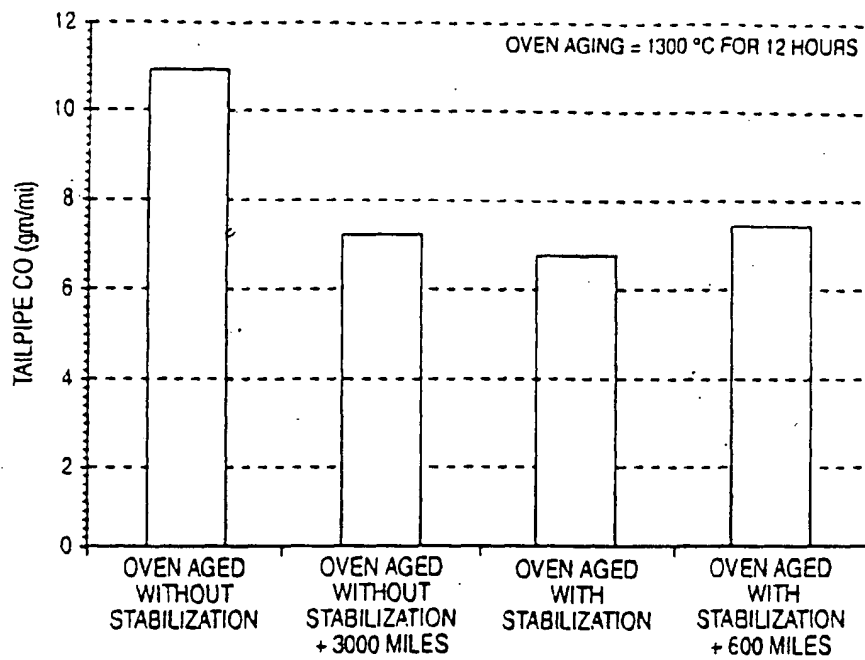
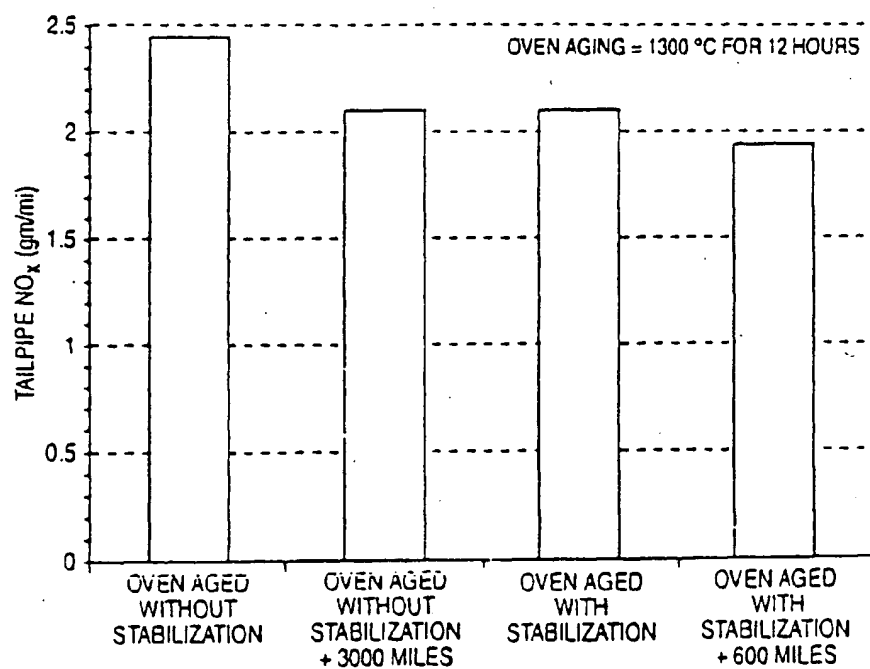


FIG. 5

FIG.6FIG.7

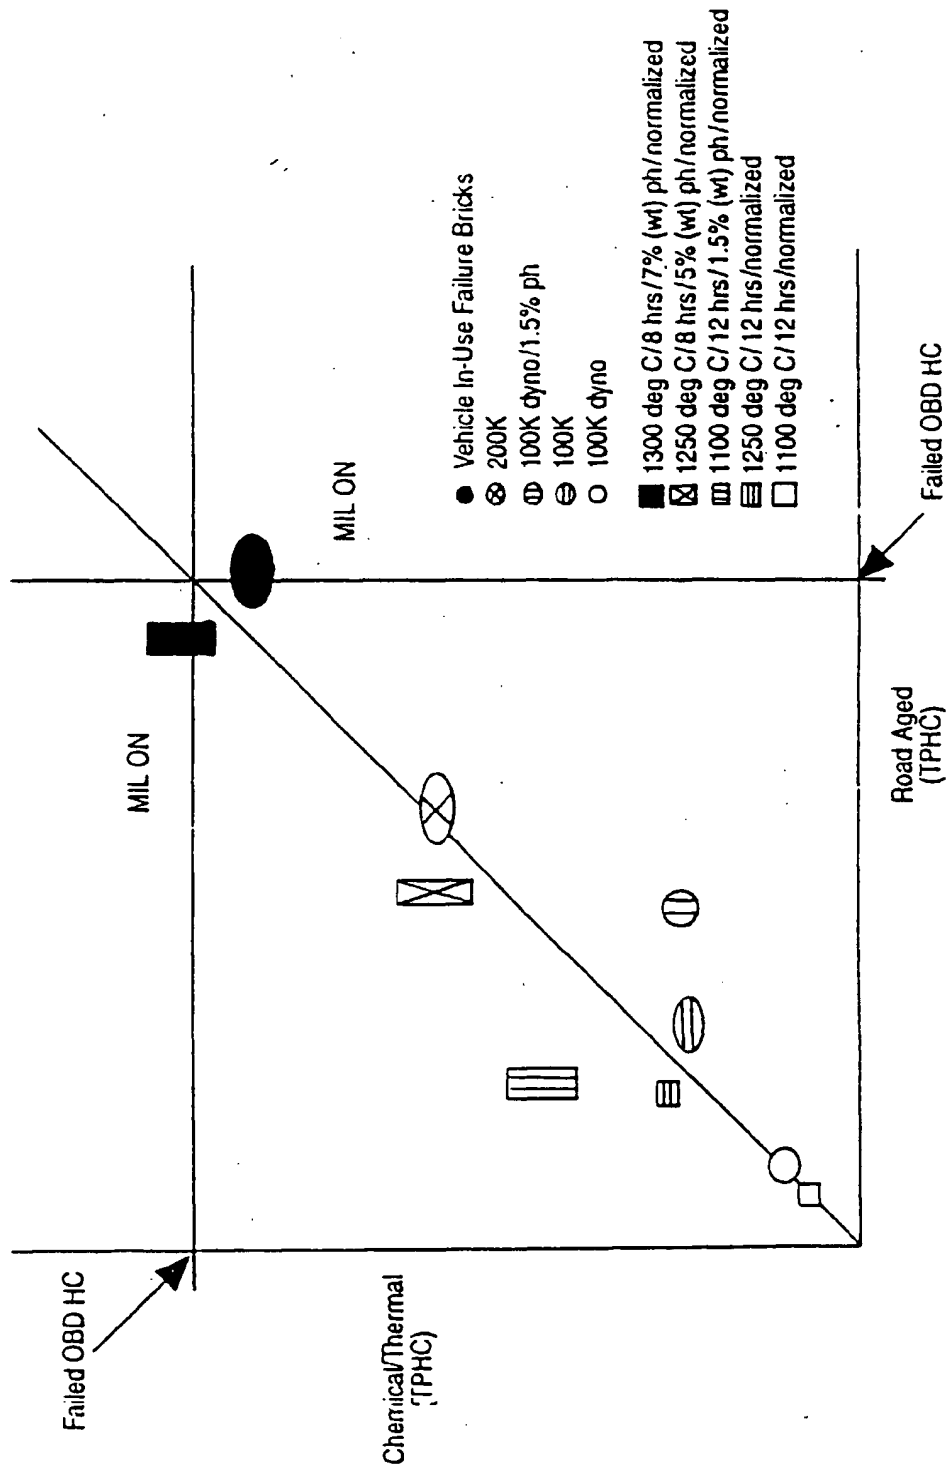


FIG. 8